


PROFESSIONAL AUDIO SYSTEM

N10F

Features:

- Water proof two-way passive speaker with one 10" woofer and one 1.5" driver.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 10" woofer is made from Ø50mm copper cladding aluminium ribbon wire.
- Heavy duty protective aluminium grille.
- The high frequency driver is protected by special design circuit to avoid being damaged when overload.
- Rotatable 90 ° 90 (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.

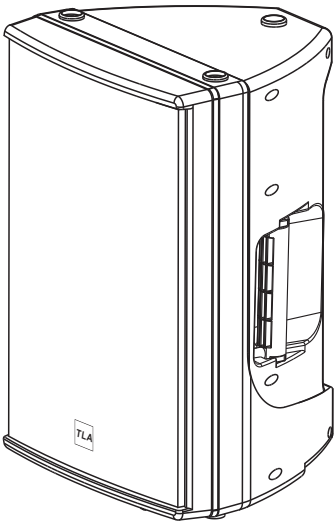

TLA




Model:N10F

Technical Parameters


System:	Built-in Crossover Two Way Full Range Speaker	
Driver Quantity:	10"x1(Bass)	1.5"x1 Driver
Frequency Response:	55Hz-18kHz	
Sensitivity(dB/1W/1m):	95 dB	
Impedance:	8 Ohm	
Rated Power:	250W RMS	
Max Sound Level:	125dB	
Tweeter Dispersion(HxV):	90°x90°	
Connectors:	Captive Fly Lead	
Dimensions(WxDxH):	321X308X464mm	
Packing Dimensions(WxDxH):	375X355X535mm	
Net Weight(kg/pc):	15.5kg	
Gross Weight(kg/pc):	17.5kg	

PROFESSIONAL AUDIO SYSTEM


N10F

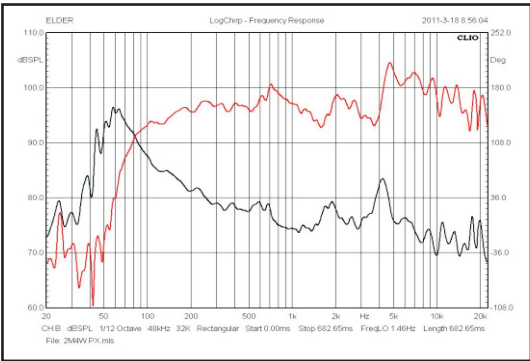


Frequency response, SPL/2.83v

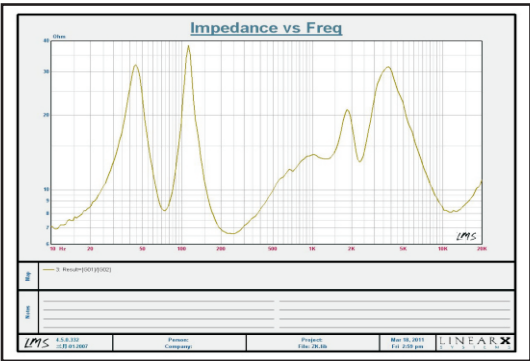

Impedance curve

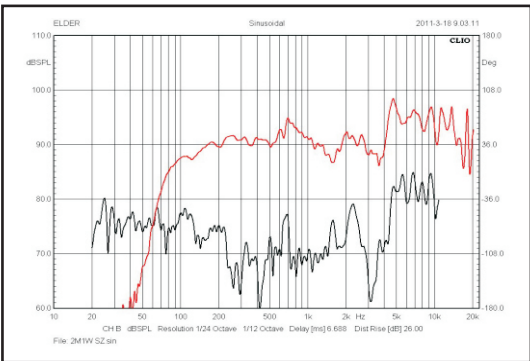

Harmonic distortion 106dB/2.5m, nominal impedance

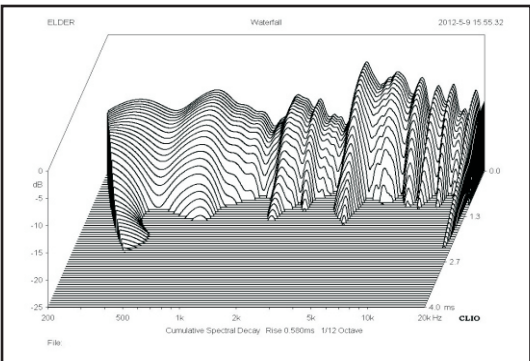

Waterfall spectrum analysis

