




UHF-5000BP-BAT BELT PACK TRANSMITTER

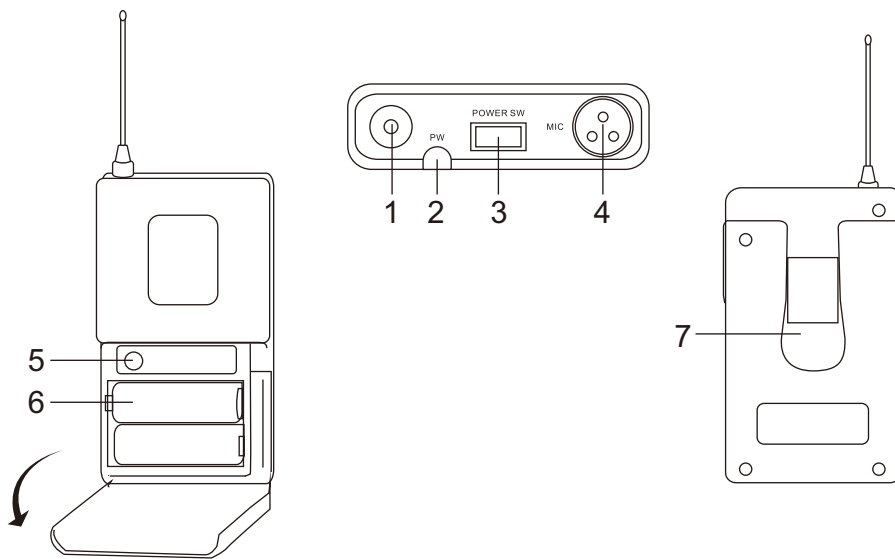

1. Antenna
2. Power/Mute indicator: Green-ready; Orange-mute on
3. On-off / mute switch: Press and hold 1~2 seconds to turn on/off transmitter. Press shortly to mute or unmute.
4. MIC input Jack
5. IR port: Receives infrared beam from receiver to synchronize frequencies.
6. Battery compartment
7. Belt clip

SPECIFICATIONS:

Frequency Range: 498.1~508.0MHz

Channels: 100

Channel Space: 100KHz

Frequency Stability: 10ppm

Transmitting power: <10mW

Modulation: FM

Max modulation: 35K

Power supply: 2X1.2V NiMH battery

Current consumption: 120mA

