

5.DMX CONTROL

CHANNEL	EFFECT	MODE 1	MODE 2	MODE 3	MODE 4	EFFECT
1	Dimmer	CH1	CH1	CH1		000-255
2	Red	CH2	CH2		CH1	000-255
3	Green	CH3	CH3		CH2	000-255
4	Blue	CH4	CH4		CH3	000-255
5	Indigo		CH5			000-255
6	Line		CH6			000-255
7	Strobe	CH5	CH7			000-255

6.SAFETY WARNING

- Every person involved with the installation, operation and maintenance of this device has to be qualified
- Unqualified person can not open the housing cover and operate the device, or the dealer will not accept liability for any resulting defects or problems.
- Power supply: AC100V-240V/50HZ-60HZ
- Make sure the power switch is off, the power plug, outlet and the earth connection is in well condition before connecting the device with the mains.
- Please use qualified power plug and outlet. Never connect the power cord of this device with other electrical equipment.
- During move and installation, make sure the device not crashed with metal parts and other tough materials.
- Always disconnect from the mains, when the device is on installation and dismantled
- The minimum distance between light-output and the illuminated surface must be more than 50cm.
- The device must only be installed on a non-flammable surface. In order to safeguard sufficient ventilation, leave 50 cm of free space around the device. Please note that heat-sensitive objects may be deformed or damaged by the emitted heat.
- During the operation the housing becomes very hot! Do not operate the device for 15 minutes after switching off.
- The maximum ambient temperature $T_a = 45^{\circ}\text{C}$ must never be exceeded. The maximum housing temperature $T_b = 80^{\circ}\text{C}$ must never be exceeded.
- For indoors use. The device against rain and moisture.
- Replace any visible cracked protective shield, filters and lens.
- The protective shield, filters and lens will require weekly cleaning as smoke/fluid tends to building up residues, reducing the light output very quickly.

LED WASH SKY200

USER MANUAL



Caution: please read this user manual carefully before you initially start-up.

1.INTRODUCTION


Thank you for having chosen a LED WASH SKY200.You will see you have acquired a powerful and versatile device.

Unpack your LED WASH SKY200

Delivery includes

DMX CABLE	1PC
Power Wire	1PC
User Manual	1PC

2.OVERVIEW

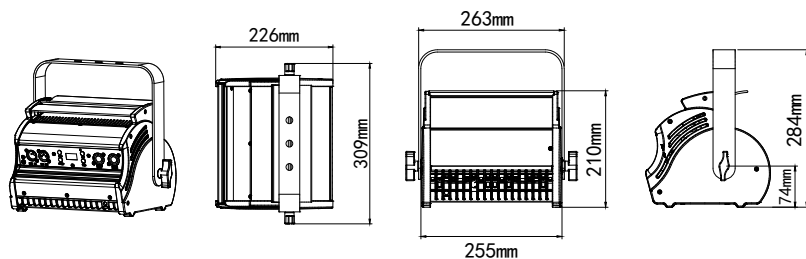

3.SPECIFICATION

- Power Supply:AC100V-240V,50/60hZ
- Power Consumption:245w
- Lamp:Led 210W,RGBLI
- Lifetime of led:more than 50000 hours
- Color temperature:2700K to 6500K
- Dimmer:0-100% linear dimmer
- Strobe:1-20 flash per second
- OLED display
- Heat:high quality radiator
- Control mode:international standard dmx512 signal,with XLR 3PIN or XLR 5PIN connectors
- Channel mode:7 channels model
- Protection grade:IP20
- Ambient temperature:-20℃—45℃
- N.W.: 9.5KGS
- G.W.:11.5KGS

4.MENU

